

Custom All Aluminum Gooseneck and 5th Wheel Trailers

BUILT FOR SPEED

High Quality Trailers Built by Racers for Racers

SEMI, GOOSENECK, FIFTH WHEEL AND PULL-A-LONG TRAILERS

WHITTALL SPRINT TRAILER



Call for a Quote - 815.426.2761

www.tande-racetrailers.com

















HERSCHER
HOME OF THE TIGERS





HERSCHER
HOME OF THE TIGERS

21918

AT
ATLANTIC
TRANSPORT

CALL TO BOOK
OR RENT
A TRUCK















MEC 1632

TRAILER

GROUND

GENERATOR




TE AUTO HAULERS
Harsco
Ill
ENT









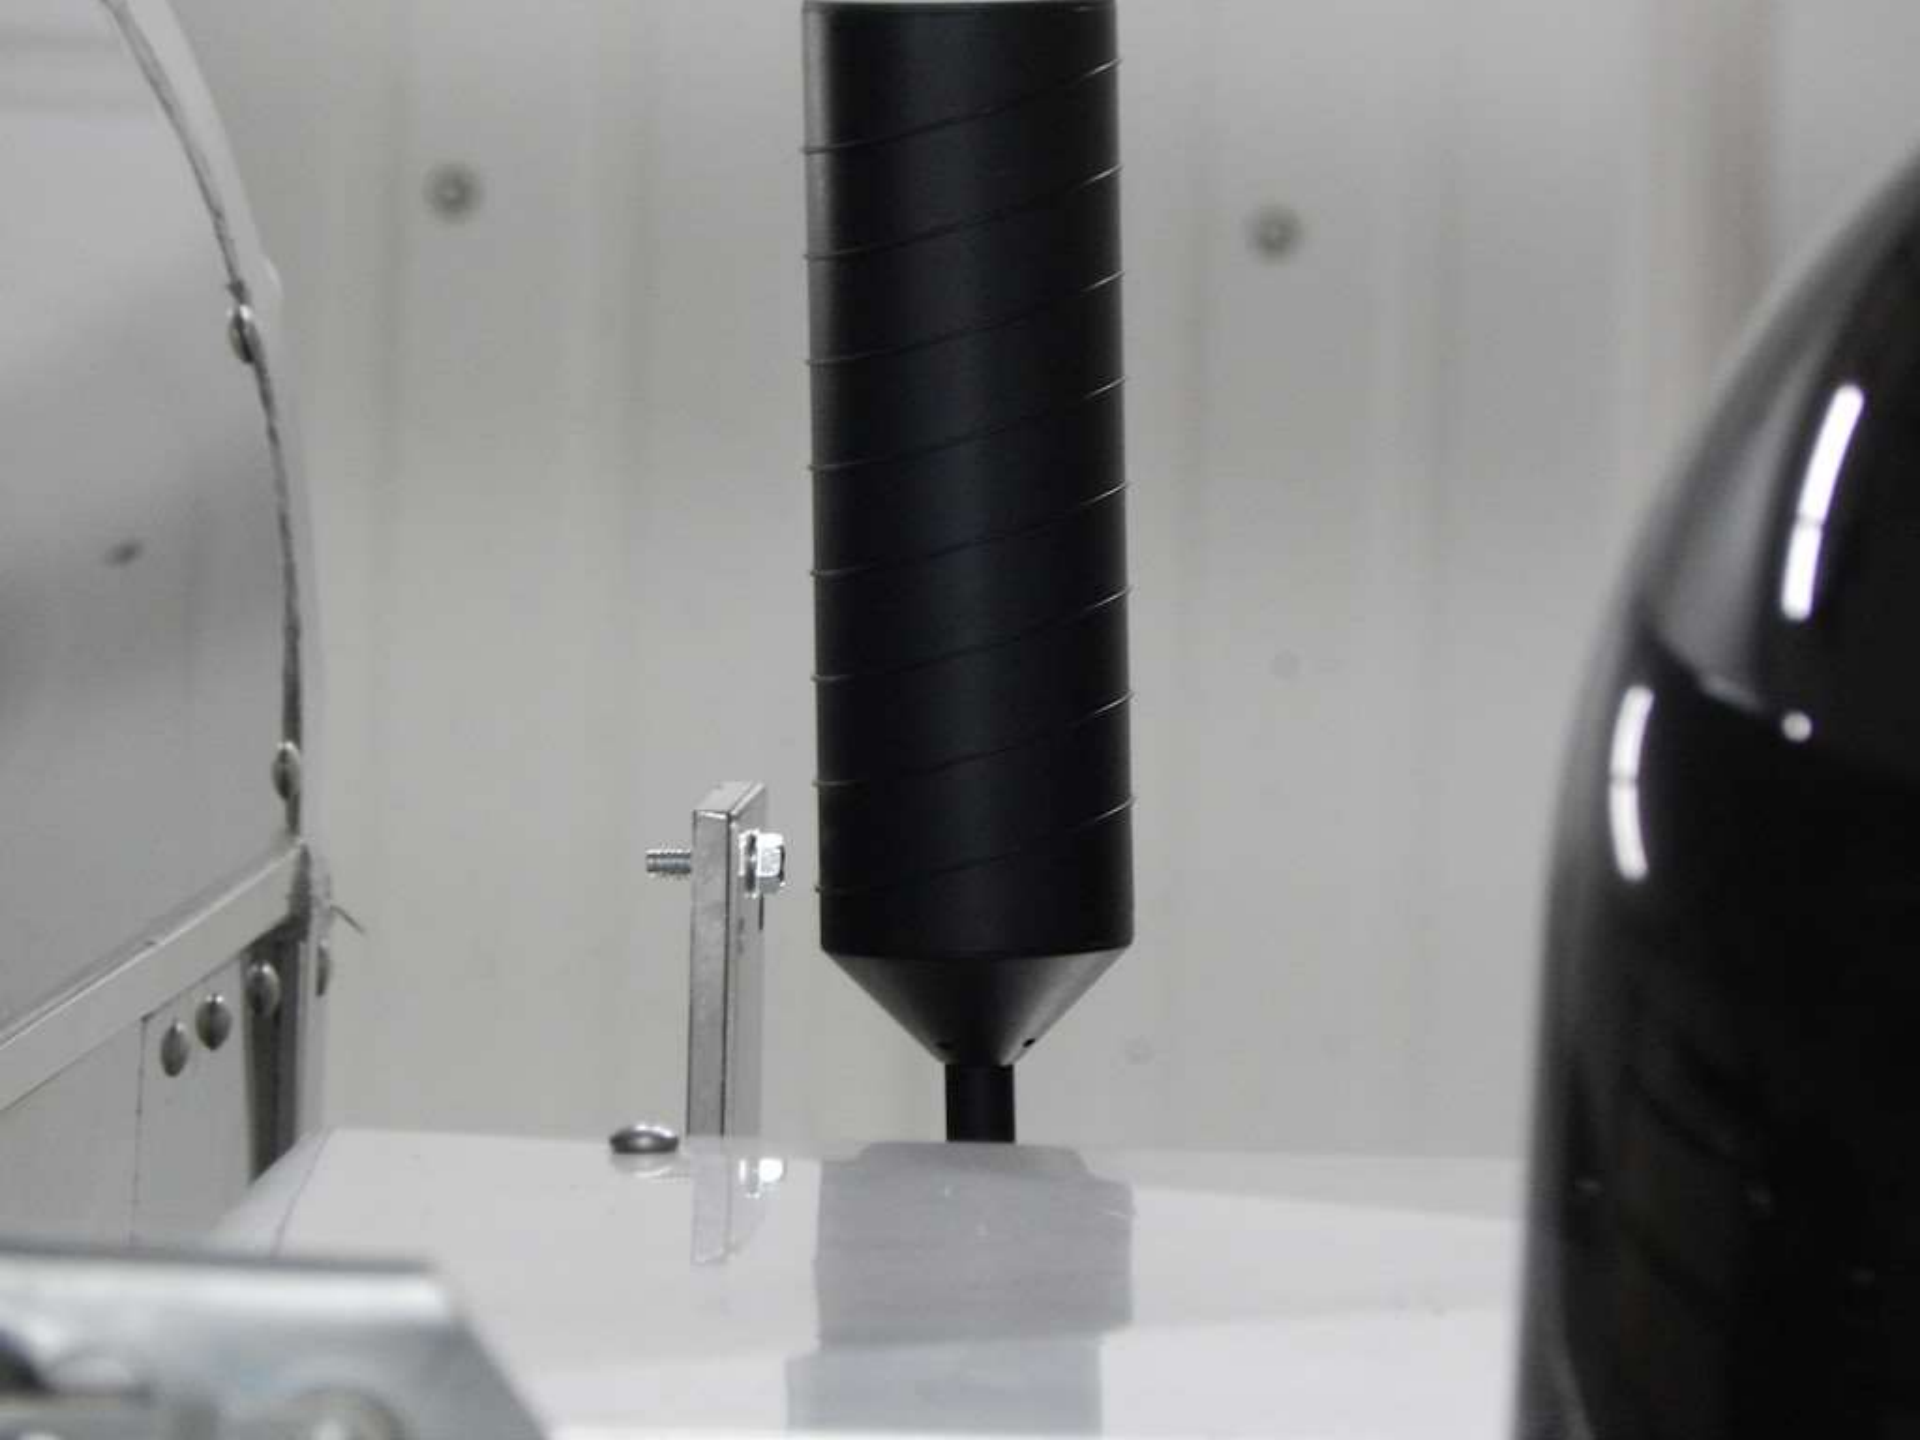

















ROTATION →




IDFB6E

4001-001
NICKEL / CHROMIUM
NICKEL / CHROMIUM H 20 141
SERIAL NUMBER 100 101 00 100
CROSS SECTION 10 10 10
P2 101



010000

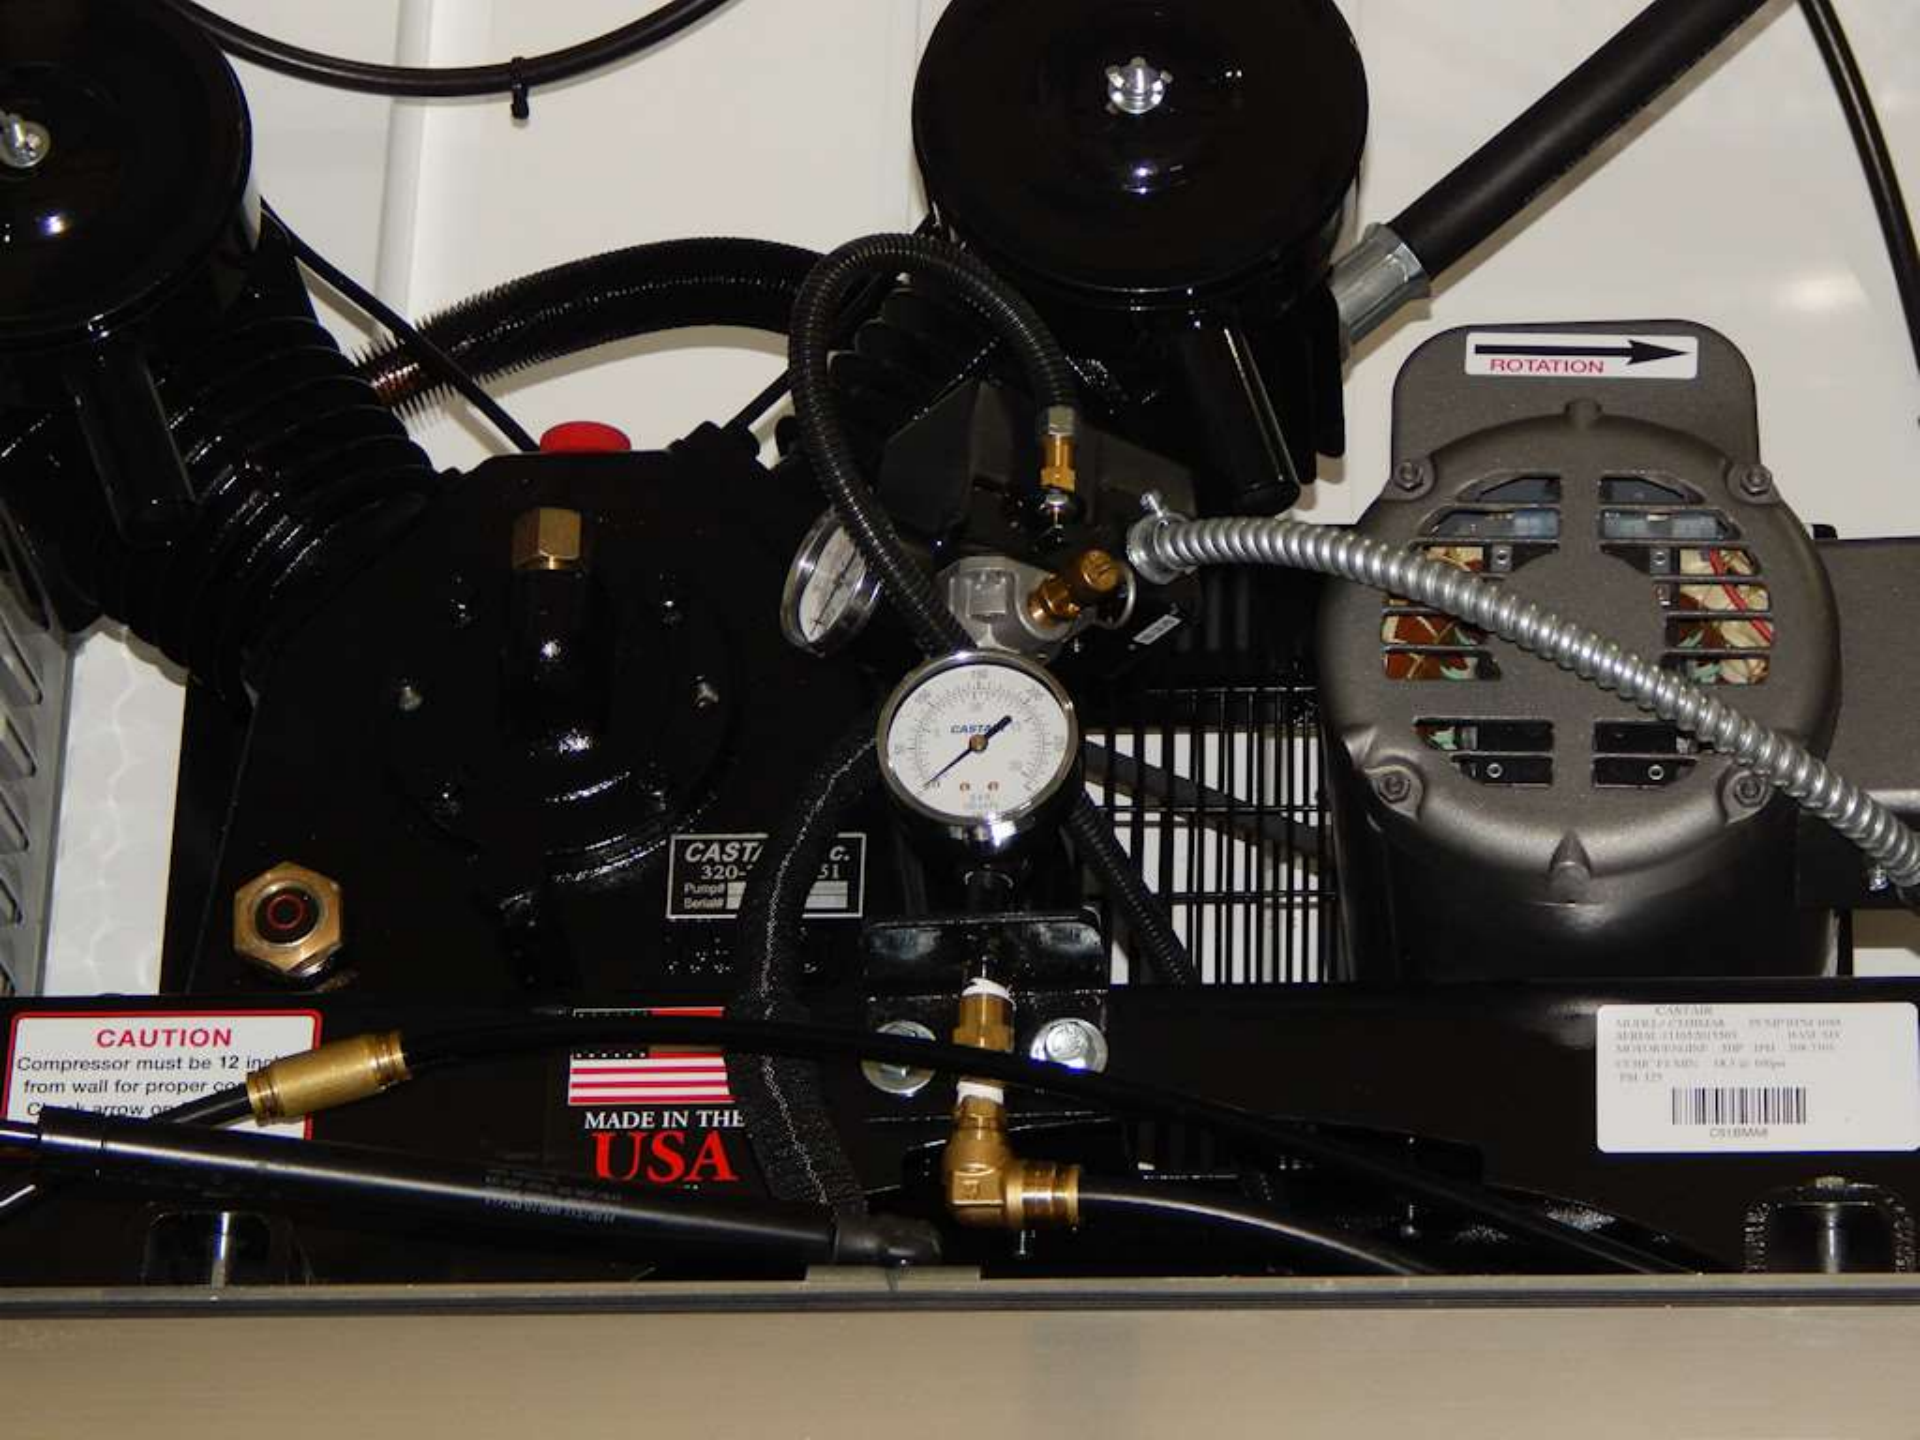

ROTATION →

CASTROL
320-7
Pump
Serial

C.
51



CAUTION
Compressor must be 12 inches
from wall for proper cooling.
Check arrow on


**MADE IN THE
USA**

CASTROL
SERIAL 0105201505 19 501154 005
SERIAL 0105201505 19 501154
MOTOR SPEED 300 RPM 3000 RPM
PH 125

C518666



T-SPEC WALL, TYPE 207

MODEL NO. **30WCXA12-AB** 30A

200V/250V - 1PH - 60HZ
157 VOLTS MIN. 257 VOLTS MAX.
MAX. CIRCUIT CAPACITY: 21
MAX. OVERCURRENT PROTECTION: 30 AMP

METER RATING 6.3 10 15 20
COMPRESSOR 1/2 3/4 1 1 1/4
100 HOURS 100 200 300 400

FACTORY CHARGED 3-120 LBS. CO₂
 SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION

WARNING: RISK OF ELECTRIC SHOCK. CAN CAUSE INJURY OR DEATH. DISCONNECT ALL REMOTE ELECTRIC POWER SUPPLIES BEFORE SERVICING.

SEE MANUAL OR WALL, TYPE 207 20-30-270
RECOMMENDED MAINTENANCE DOCUMENTATION CAN BE FOUND AT: www.fristco.com

Multiple systems operate at lower refrigerant pressures than R-22 systems. Frisco equipment may require special R-410A service equipment.

R-410A systems require a 1/2" service valve. R-410A systems require a 1/2" service valve. R-410A systems require a 1/2" service valve.

R-410A systems require a 1/2" service valve. R-410A systems require a 1/2" service valve. R-410A systems require a 1/2" service valve.

WARNING: Service lines must be in place before recharging or charging the unit.

AVERTISSEMENT: Pours de service. Assurez-vous que les lignes de service sont en place avant de recharger ou de charger le système.

UNIT CHARGE: Adjust charge to 1 1/2" of subcooling when unit is equipped with an expansion valve.

AVERTISSEMENT: Ajustez la charge à 1 1/2" de sous-refroidissement lorsque l'unité est équipée d'une vanne d'expansion.

PRENHAO D'ACÉSSO DO FIM DO PLACAS DEBASTA DESMONTAR O ARRABALHO.

ENERGYGUIDE

Central Air Conditioner
 Split System
 Single-Circuit Breaker

Unit Co.
 Model 30WCXA
 Capacity: 27,000 Btu/h

Efficiency Rating (SEER)
12.0 - 12.0

12.0 Least Efficient 14.0 Most Efficient

Range of Similar Models
 (National Energy Efficiency Ratio)

Notice
 This product will meet or exceed Federal energy efficiency standards. See www.fristco.com for additional information.

Weather Data

Year	South	South-East	North
2009	12.0	11.9	12.3
2008	12.0	1.8	12.4

Product law effort. This unit to be installed in U.S. homes and businesses.

LRE0000

WCX12 Series
R410a Condensing Unit
INSTALLATION INSTRUCTIONS

****WARNING TO INSTALLER, SERVICE PERSONNEL AND OWNER****
 Allowing the product or replacing parts with non authorized factory parts voids all warranty or implied warranty and may result in adverse operational performance and/or a possible hazardous safety condition to service personnel and occupants. Company employees and/or contractors are not authorized to waive this warning. Complaint Maintenance Program is available at www.fristco.com under "Product Information".

WARNING TO INSTALLER, SERVICE PERSONNEL AND OWNER

Allowing the product or replacing parts with non authorized factory parts voids all warranty or implied warranty and may result in adverse operational performance and/or a possible hazardous safety condition to service personnel and occupants. Company employees and/or contractors are not authorized to waive this warning. Complaint Maintenance Program is available at www.fristco.com under "Product Information".

CASTAIR Inc.
320-796-0851

Pump#

V439

Serial#

11111111111111111111

V439-800

CASTAIR

MODEL# C51BMA8

SERIAL #11052015503

MOTOR/ENGINE 5HP

CUBIC FT/MIN

PSI 125

PUMP RPM 1088

BASE MT.

1PH 208/230V

18.3 @ 100psi



C51BMA8

IDFB6E-11N-K

VOLTAGE	1Phase AC110V 50Hz
RATED CURRENT	3.0A
MCA	15A
MOPD	25A
CMP LRA	13A
AIR FLOW RATE	250CFM
MAX. INLET PRESS.	240psi (1.6MPa)
MAX. INLET TEMP.	122 °F (50 °C)
MAX. AMBIENT TEMP.	104 °F (40 °C)
MIN. AMBIENT TEMP.	36 °F (3 °C)
REFRIGERANT R134a	0.1oz (30g)
LO. SIDE PRESS.	150psi (1.0MPa)
HI. SIDE PRESS.	250psi (1.7MPa)
WEIGHT	57lbs (26kg)
SERIAL No.	X202100 DEC '10
MAKER	SMC CORPORATION Aikohara 1011 1F-4-10-1, Sotokanda, Chiyoda-ku, Tokyo 101-8201, Japan



AIR DRYER
25WZ



MADE IN SINGAPORE

100%



MAX. RPM 1800
MAX. LOAD 1000W
ELECTRONIC THERM
12V 100A
12V 100A

IDFB6E

CAUTION
Do not touch
moving parts
or hot surfaces
when the engine
is running.


MADE IN USA

12V 100A
12V 100A







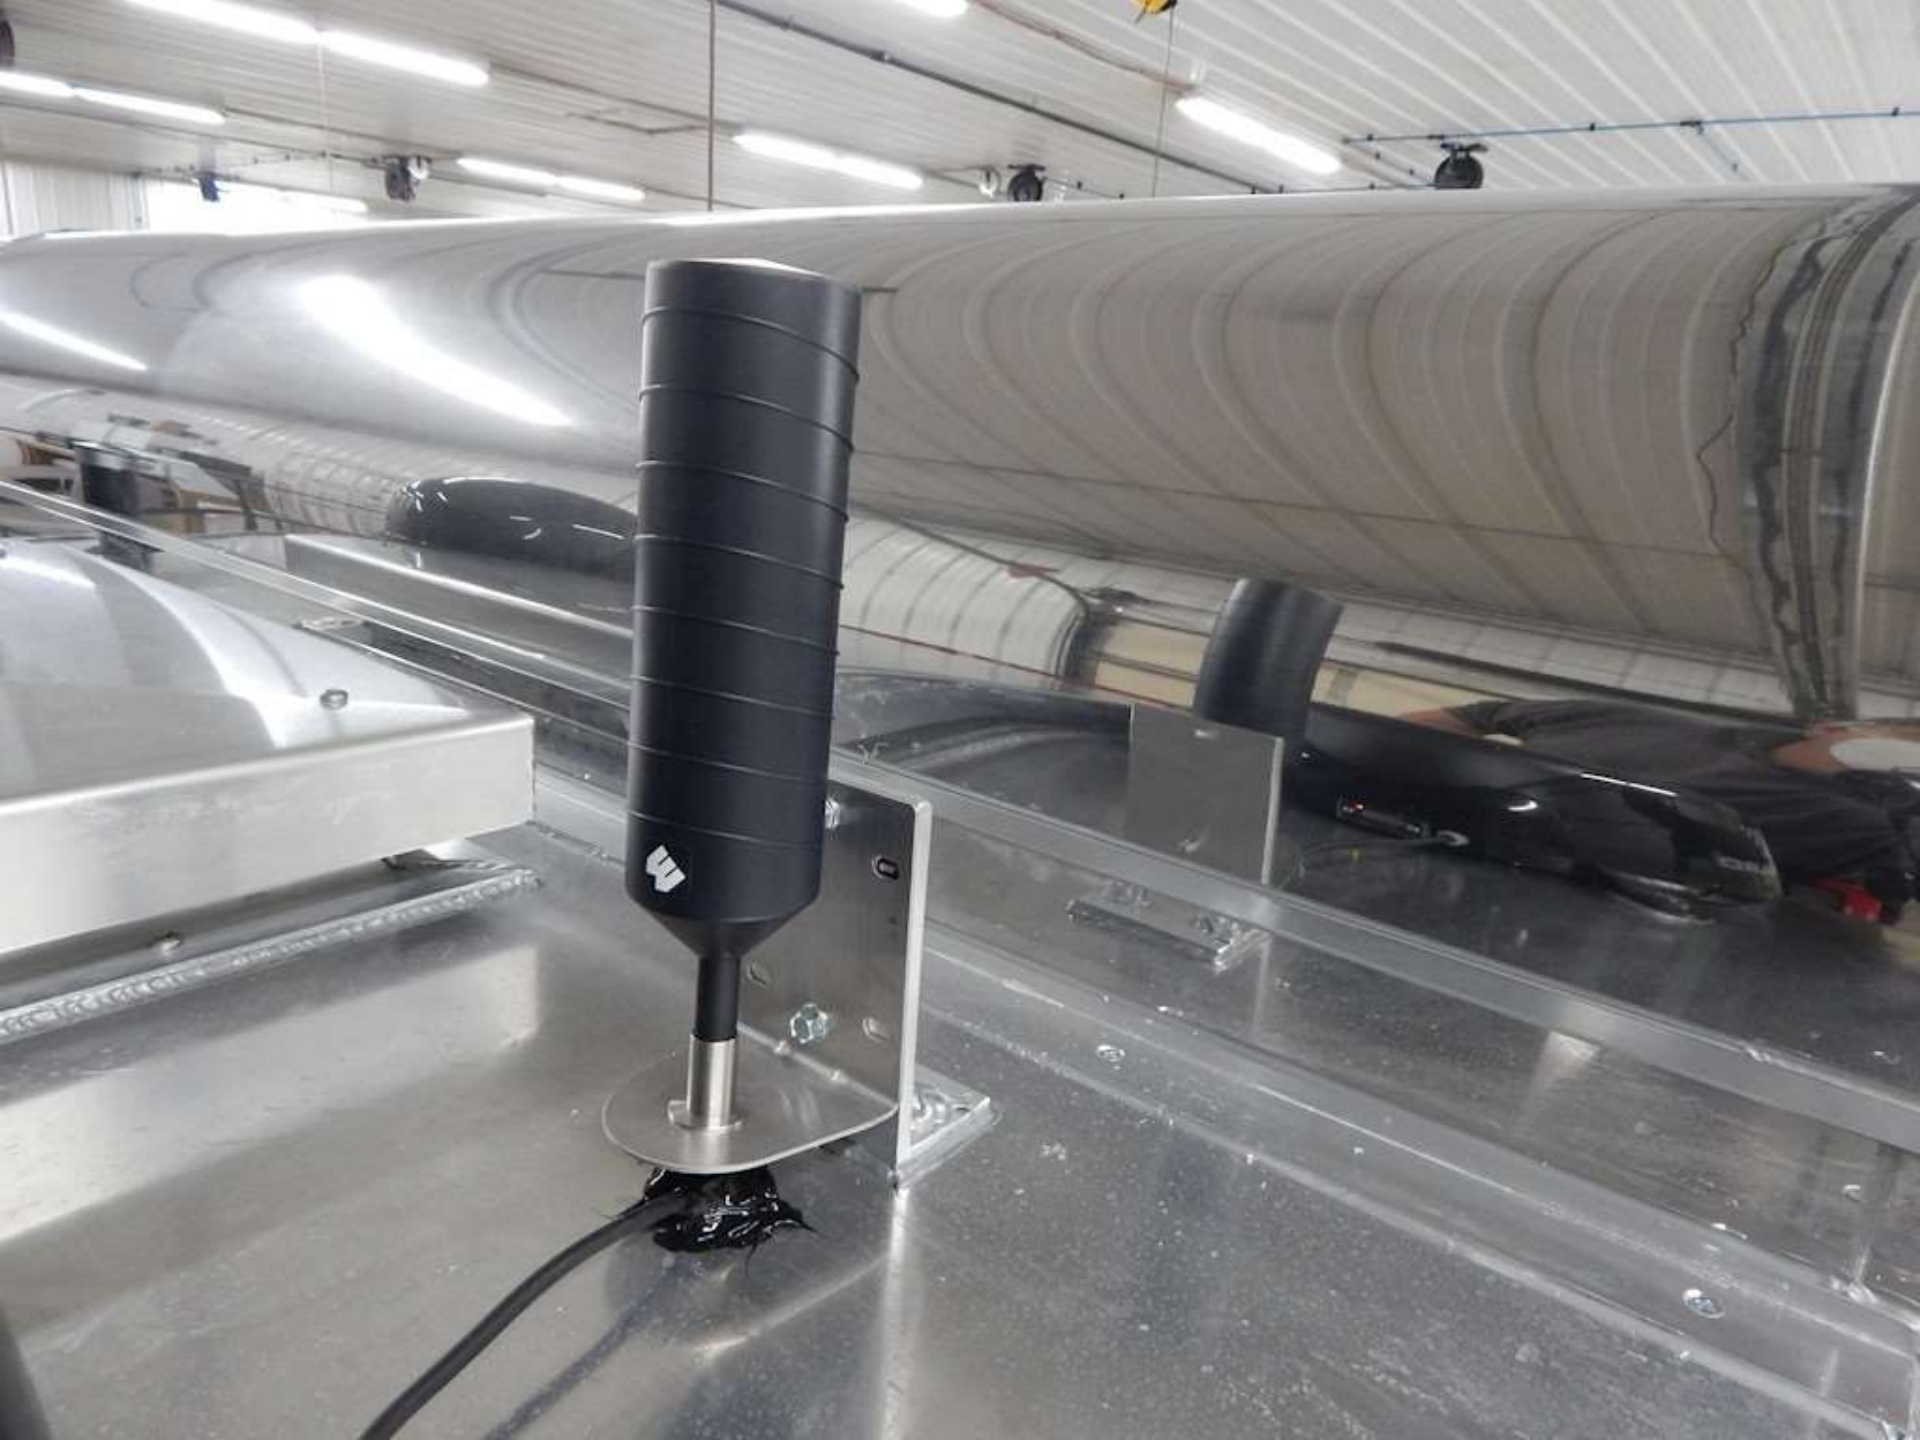





















Custom Built Trailers by
T & E ENT.
Auto Haulers
HERSCHER, IL
815-426-0787







TE ENT.
Auto-Heaters

BEWARE
OF RAMP
ACCIDENTS

STANLEY



WARNING Do not walk on roof
WARNING Do not walk on roof
WARNING Do not walk on roof
CAUTION DO NOT ALL
SIDE AND SAFETY
LATCHES BEFORE
MOVING TRAILER
CAUTION DO NOT OPEN
MANUAL LATCHES
WHILE IN LIFTING
OR LOWERING
OPERATION

MEC 1632





SHORE POWER

DANGER
WARNING
DO NOT TOUCH
ELECTRICAL
COMPONENTS
WHILE THE
SYSTEM IS
OPERATING

POWER TECH
OFF AUTO RUN

RETURN

TRUCK

TRAILER
SUPPLY

TRUCK

TRAILER

3001



GENERATOR

TRUCK

RETURN

TRUCK

TRUCK

TRUCK

DIESEL FUEL ONLY


SUPPLY

RETURN

AUX





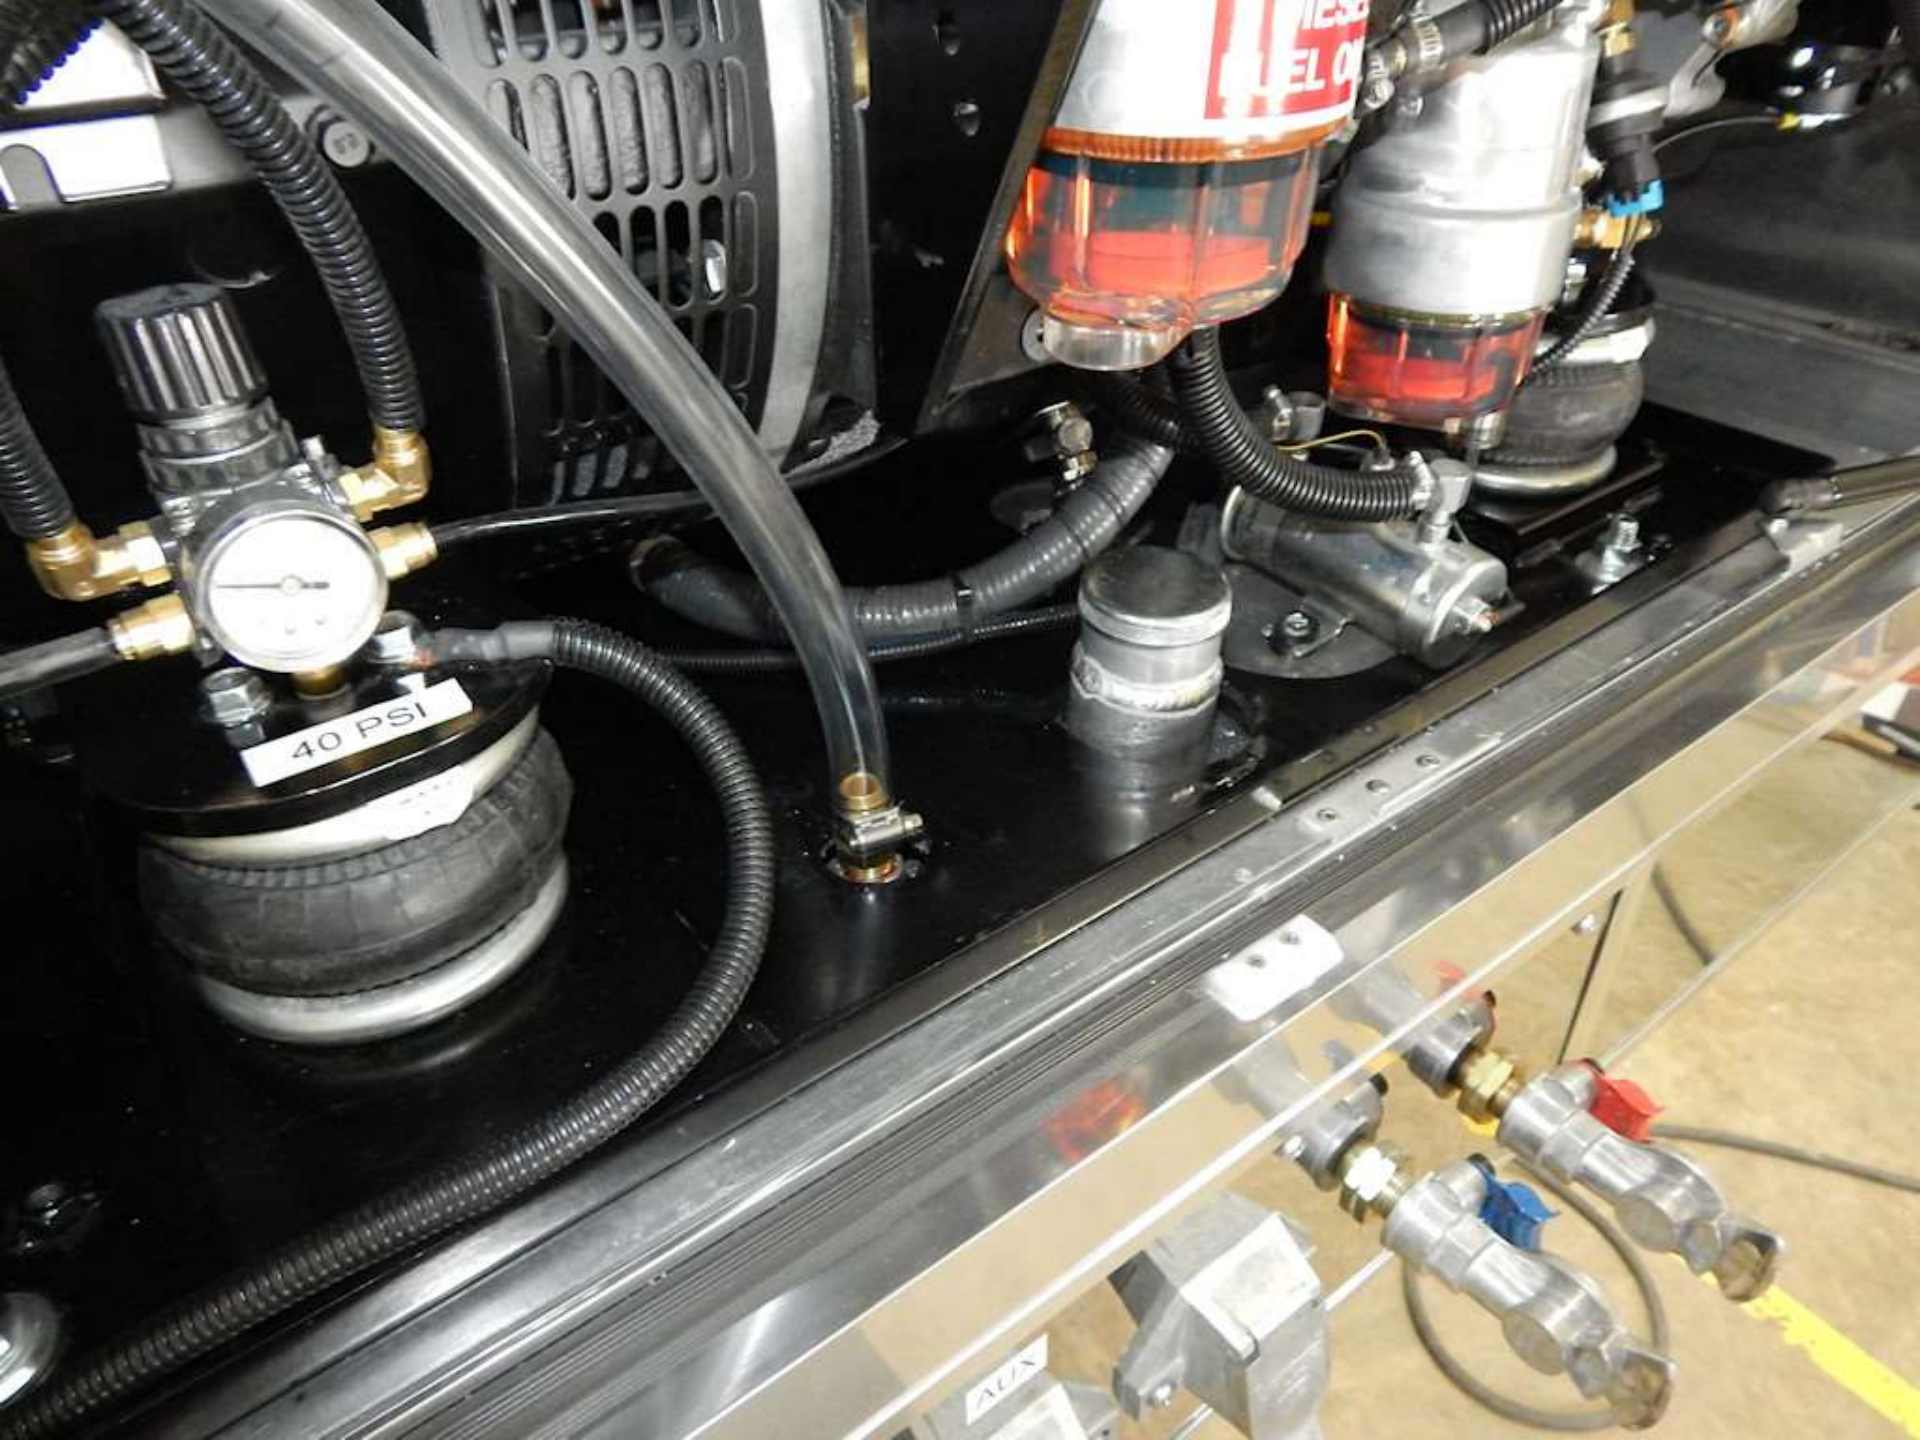

40 PSI

WESS
DEL O

AGA

SHORE POWER

DANGER
DANGER OF ELECTRICAL SHOCK
DANGER OF ELECTRICAL FIRE

POWER TECH
ELECTRICAL SYSTEMS

ENTER

OFF AUTO RUN

POWER TECH ELECTRICAL SYSTEMS

CRMA 4478
VOLTAGE 240
PHASE 1
POWER FACTOR 0.9
PROTECTION CLASS

RETURN

TRUCK

TRUCK
SUPPLY

TRUCK

TRUCK
RETURN

7001





INDUSTRIAL
POWER

RETURN

TRUCK

Parker
TRAILER

PTI-20-T4F
SN IPT45BJT27431
CBM# 1003476
KW 20 VOLTAGE 120/240
PHASE 1 AMPS. 166/83
HZ 60 POWER FACTOR 1.0
1800 INSULATION CLASS F
Y CONT. AMBIENT 40. C.
ULTRA LOW SULPHUR DIESEL ONLY

POWERTECH GENERATORS LEESBURG, FL 34748
POWERTECHGENERATORS.COM 1-800-760-0027
MADE IN THE U.S.A. WITH U.S. SOURCED COMPONENTS

WARNING: Diesel engine exhaust and noise can be harmful to your health. Use of generator in enclosed spaces may cause the engine to overheat. Always use proper ventilation. Read the manual for more information. For more safety information, visit us online at www.powertech.com.



RETURN

TRUCK

TRAIL
SUPPLY

TRUCK

DIESEL
FUEL

SUPPLY

RETURN

AUX



RETURN

TRUCK

TRAILER SUPPLY

TRUCK

AUX











Noronid

Power

Error



Set

°C
















































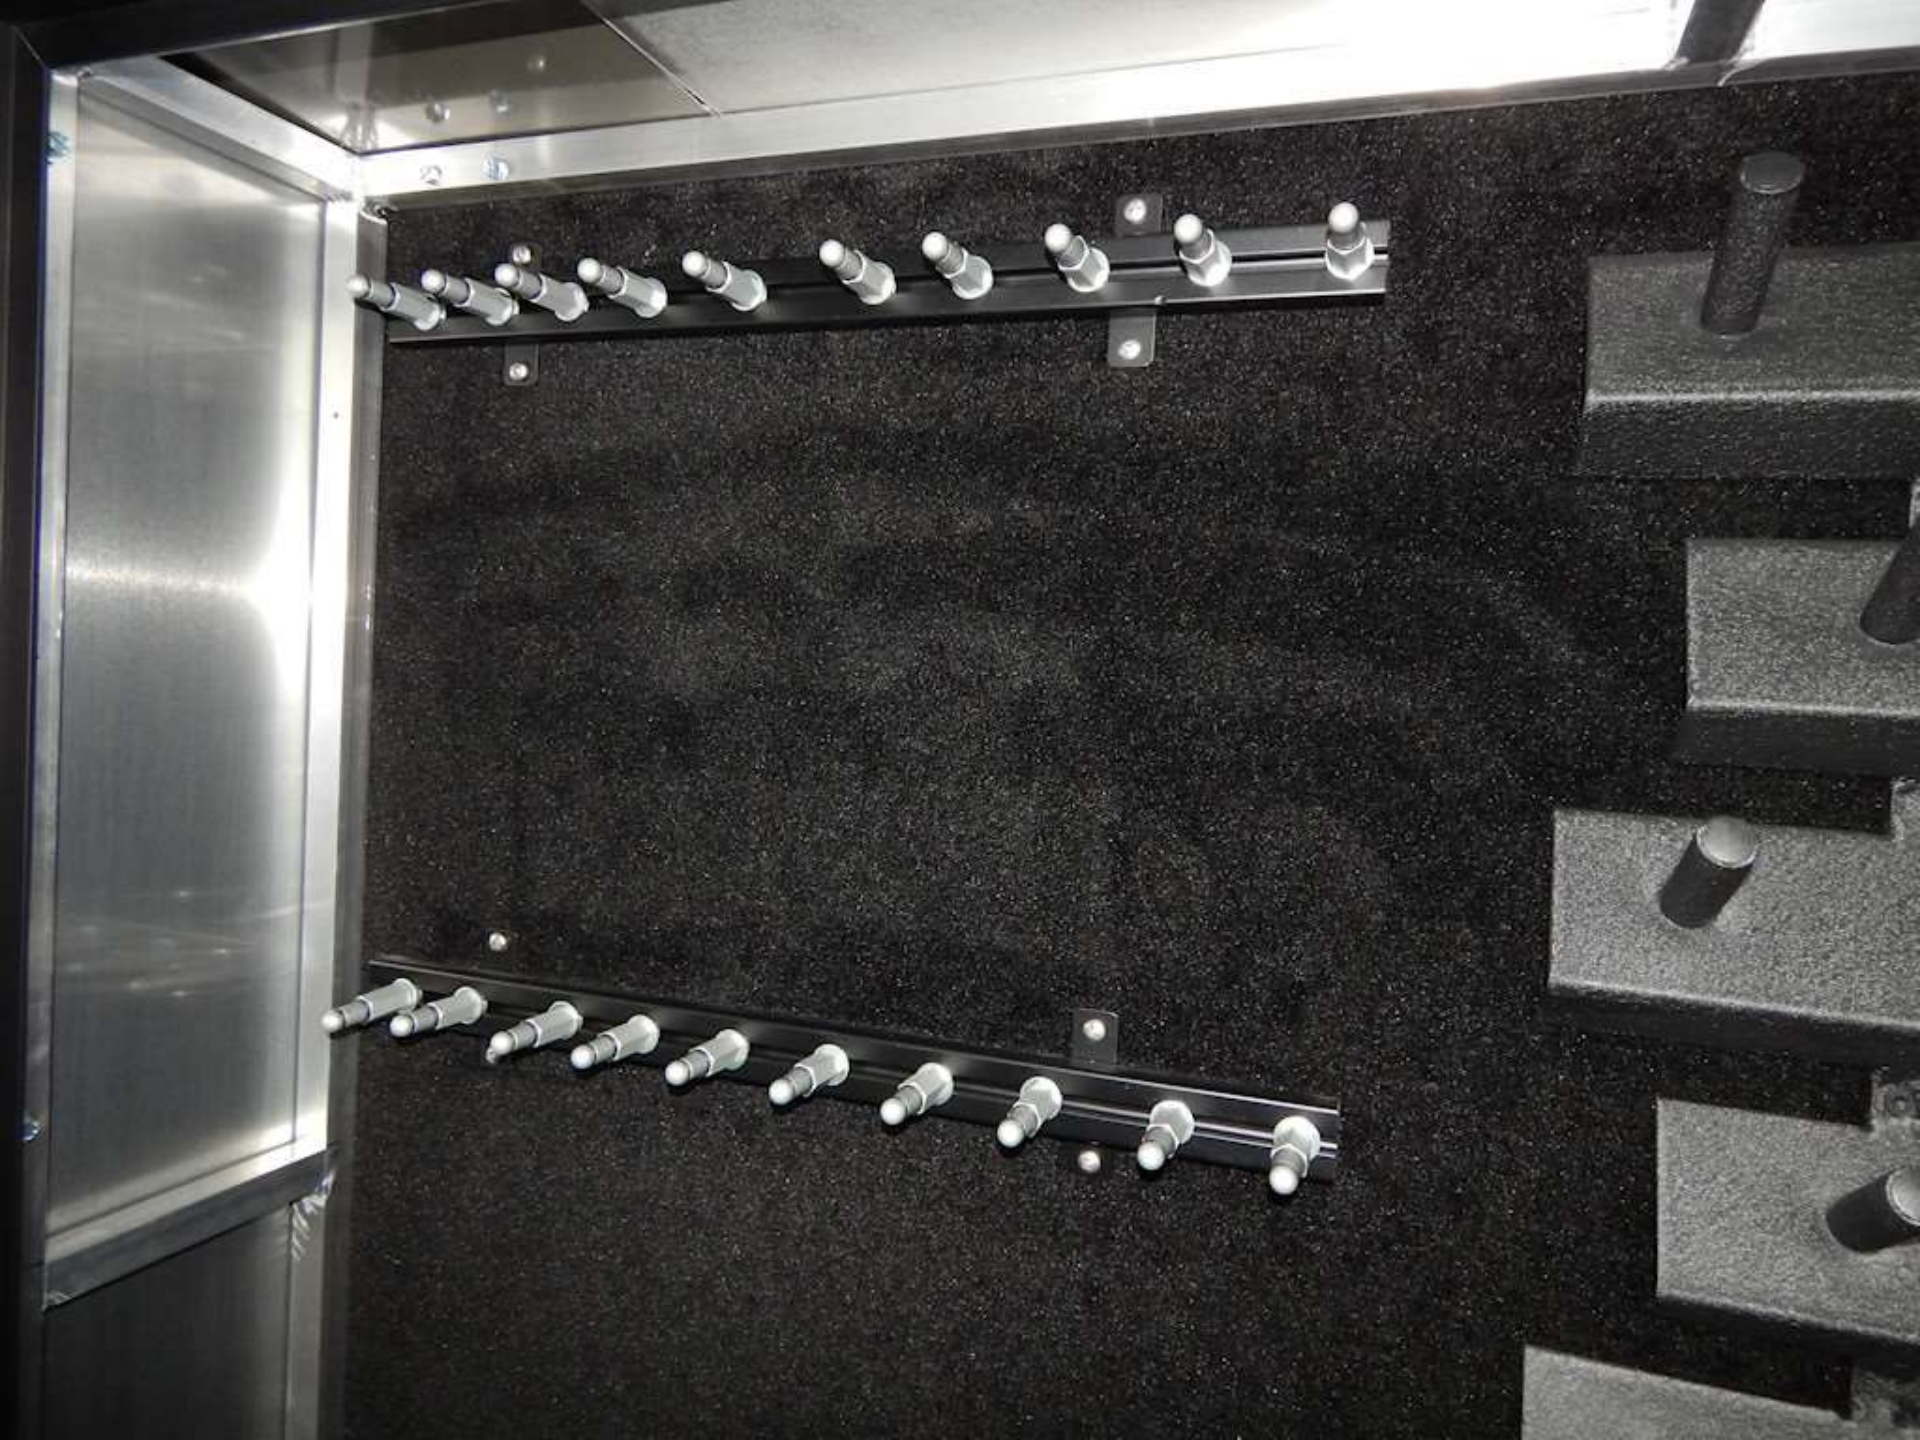

































LISTA





AIR BAG
BRAKE PADS







LISTA



UPR





Control panel featuring:

- Top gauge: Pressure or temperature indicator.
- Middle gauges: Two large circular gauges for monitoring system parameters.
- Bottom controls: Digital display, red emergency stop button, and green indicator light.
- Brand: ROVERHY logo.































WINEGARD

SONY

DIRECTV HD DVR

COMBAT





PF8

- Time Cook
- Time Defrost
- Weight Defrost
- Power
- Clock
- Kitchen Timer
- Popcorn
- Potato
- Pizza
- Frozen Vegetable
- Beverage
- Dinner Plate
- Express Cook
- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- Pause Off
- 0
- Start +30 Sec





WINEGARD

SONY

SONY

DIRECTV HD DVR










































































































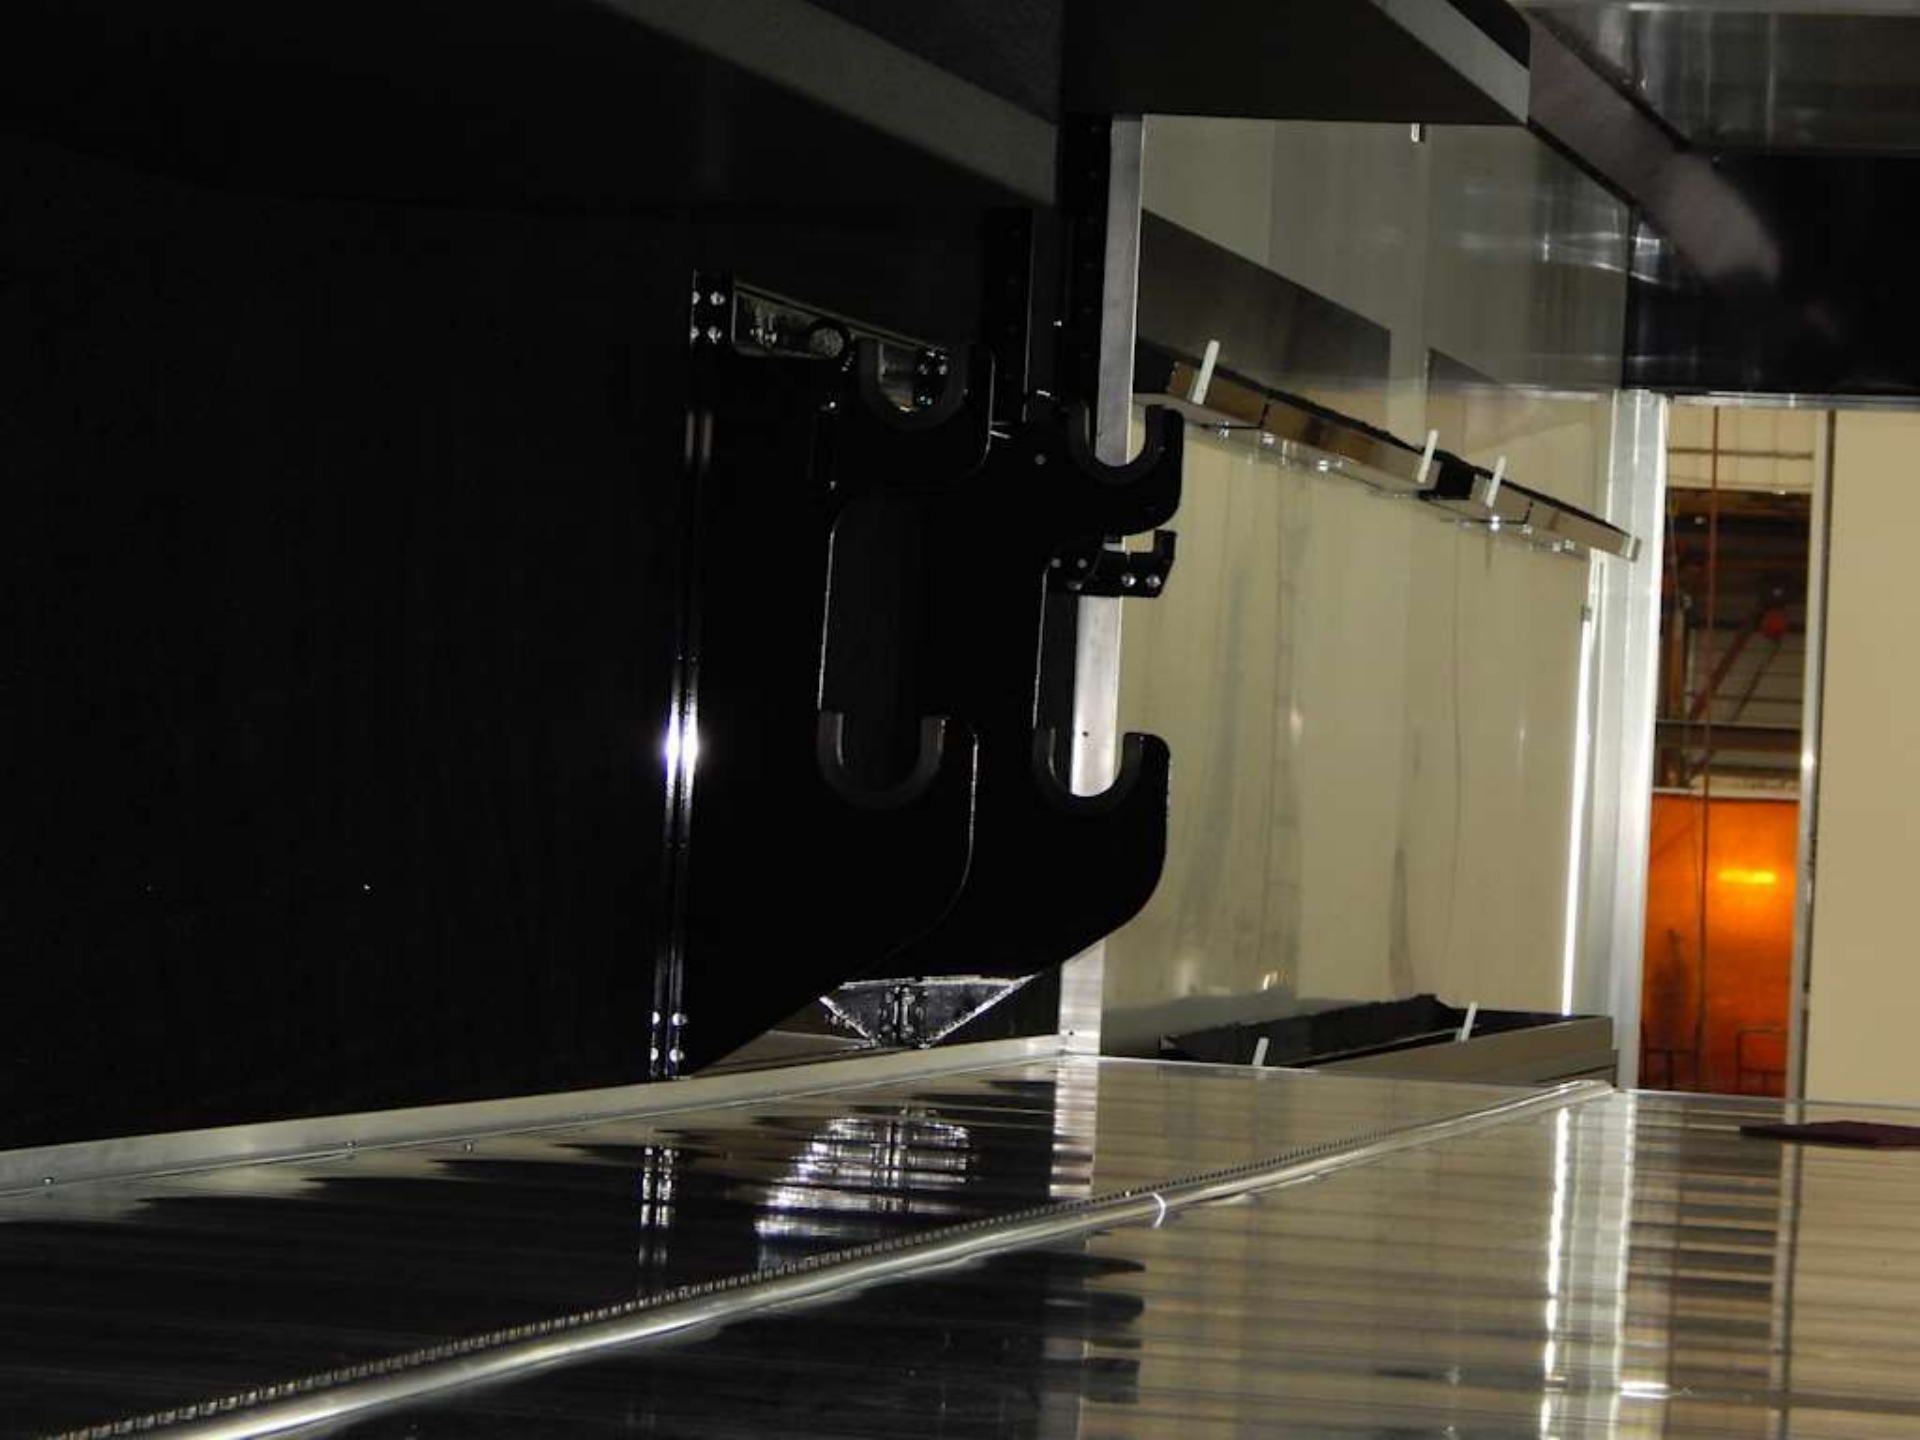































LOWER 12V

LOWER 110V

REAR 110V

UPPER 12V

FLOOD

AIR COMP







125

DRAIN
FRESH WATER

BLACK GREY

BLACK

DANGER

Please do not drink water until the filter has been replaced. The filter must be replaced every 12 months or 1000 gallons of water, whichever comes first. Do not touch the filter. Do not touch the water. Do not touch the filter. Do not touch the water. Do not touch the filter. Do not touch the water.

IMPORTANT / IMPORTANTE

Please do not drink water until the filter has been replaced. The filter must be replaced every 12 months or 1000 gallons of water, whichever comes first. Do not touch the filter. Do not touch the water. Do not touch the filter. Do not touch the water.

FRESH WATER

GREY

BLACK GREY

BLACK









VOLTAGE
12.6



BLACK GREY

GREY









TENT
Auto-Haulers









